

ASSEMBLY INSTRUCTIONS



2 Persons



60 minutes

1

Prepare both metal plates **1** each with 6 flat-head screws, plastic washers and saddle washers (arranged in a mirror image).



Lay it flat on the floor

2 x



12 x



Flat-head screw

12 x



Plastic washer

12 x



Saddle plate

2

Next, fit the rods (curved end facing upwards) and 6 saddle washers on each (mirrored for the left and right sides). Tube **2** (short rod), Tube **3** (with hole for strut), Tube **4** **5** **6** (swivel tubes). Fitting the Tube **7** should be left until later.



1 x

2 3 4 5 6

12 x




Saddle plate

3

Fit the base plate **8** and screw the lock nuts onto the flat-head screws. Tighten the nuts with the plastic washers for the pipes **2** and **3** firmly. For swivel pipes **4** **5** **6** tighten them only slightly to ensure they can swivel freely.

2 x




12 x



Lock nut


Outside




ASSEMBLY INSTRUCTIONS

4

Attach strut **9** to pipes **3** and **2** respectively, using slotted screws, metal U-washers, saddle washers and nuts (without the plastic ring).

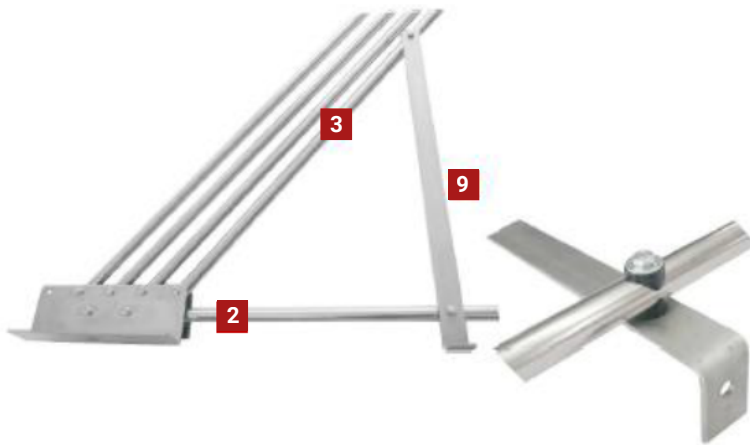

- 4 x  Slotted screw
- 4 x  Washers
- 4 x  Nut
- 8 x  Saddle plate
- 2 x  **9**


5

Insert the curved sections **2** into the hem of the tarpaulin (reverse side) on both sides. Ensure that the climbing fasteners are on the inside. Then connect all the curved sections together.

6

Before you pull the tarpaulin over the remaining poles, it is advisable to secure the floor panels **8** (drill spacing 108 cm) and then the struts **9** to the floor.




- 4 x  
- 4 x 
- 4 x 

ASSEMBLY INSTRUCTIONS

7

Insert the curved sections **7** into the hem of the tarpaulin on both sides and secure them to the base plates **8** then assemble the curved tubes.

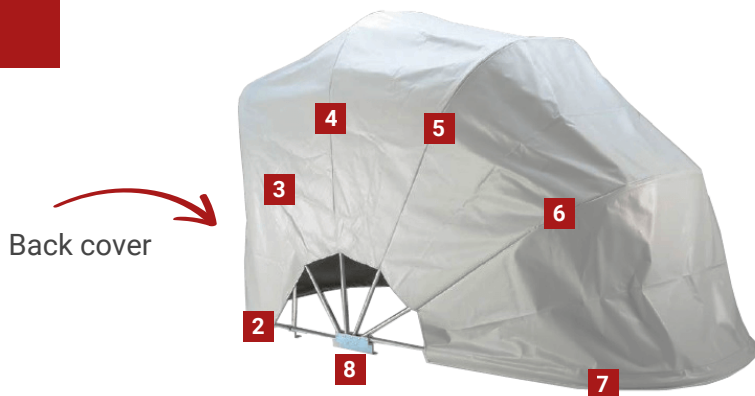

2 x



Flat-head screw

4 x



Saddle plate

2 x



plastic disc

2 x




Lock nut

8

Secure the tarpaulin to pipe bends **3** **4** **5** **6** using the Velcro fasteners. Ensure that the tarpaulin is inserted evenly around pipes **2** and **7**


To open, swing bracket **4** sideways towards bracket **3**. Do not use the bracket **7** to open the structure.

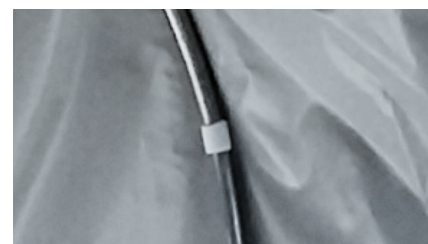

Content


2

1 x




2

1 x




3

1 x




3

1 x



4 **5** **6** **7**

4 x




4 **5** **6** **7**

4 x



4 x



4 x




14 x



2 x Metal plate



14 x



14 x



36 x



2 x floor panel



4 x



For fixing to the ground

4 x



4 x



4 x



2 x Strut



To clean the tarpaulin, use only mild soapy water and rinse thoroughly. Other cleaning products may damage the PVC tarpaulin!